

DLP 38 MLED



* decor ring must be ordered separately

Type	Wattage	Light source	Lumens	Weight
DLP 38-MLED 170/107/...	7 W	LED	980 lm	1,3 kg
DLP 38-MLED 170/112/...	12 W	LED	1370 lm	1,3 kg

Downlight, 1x7W / 1x12W LED

Application

cabins, lounges, dining rooms, accomodation rooms etc.

Approvals

according to the rules of relevant classification societies, additional IEC

Housing

galvanized steel, powder coated white

Cover

diffuser made of PC opal with decorative ring is an integral part of luminaire but must be ordered separately


Cable entry

3/5 pole plug and socket


Mounting

max 6 mounting holes, cut out: 144 mm


DIMENSIONS [mm]

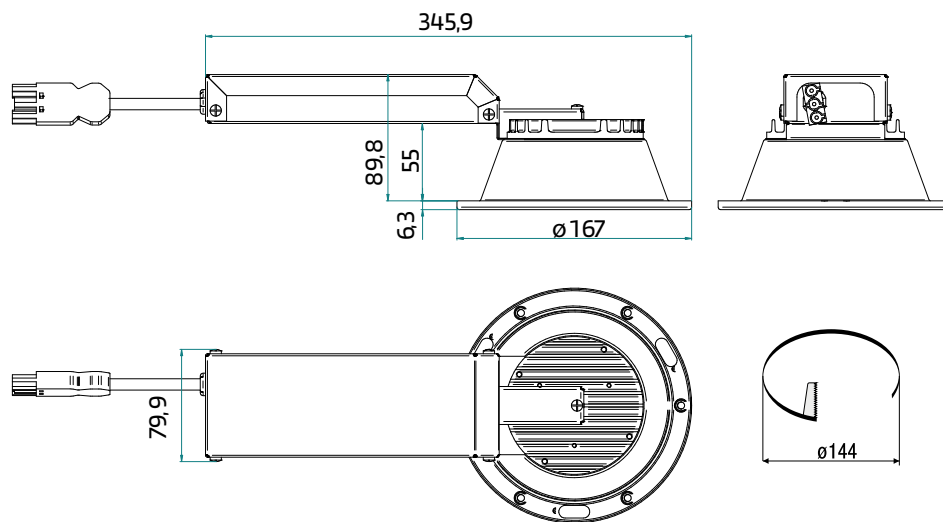

Emergency version (dimensions of luminaire)

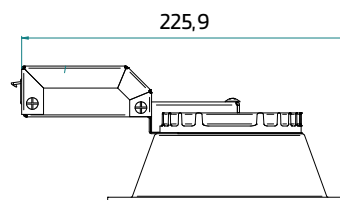

ORDER SPECIFICATION

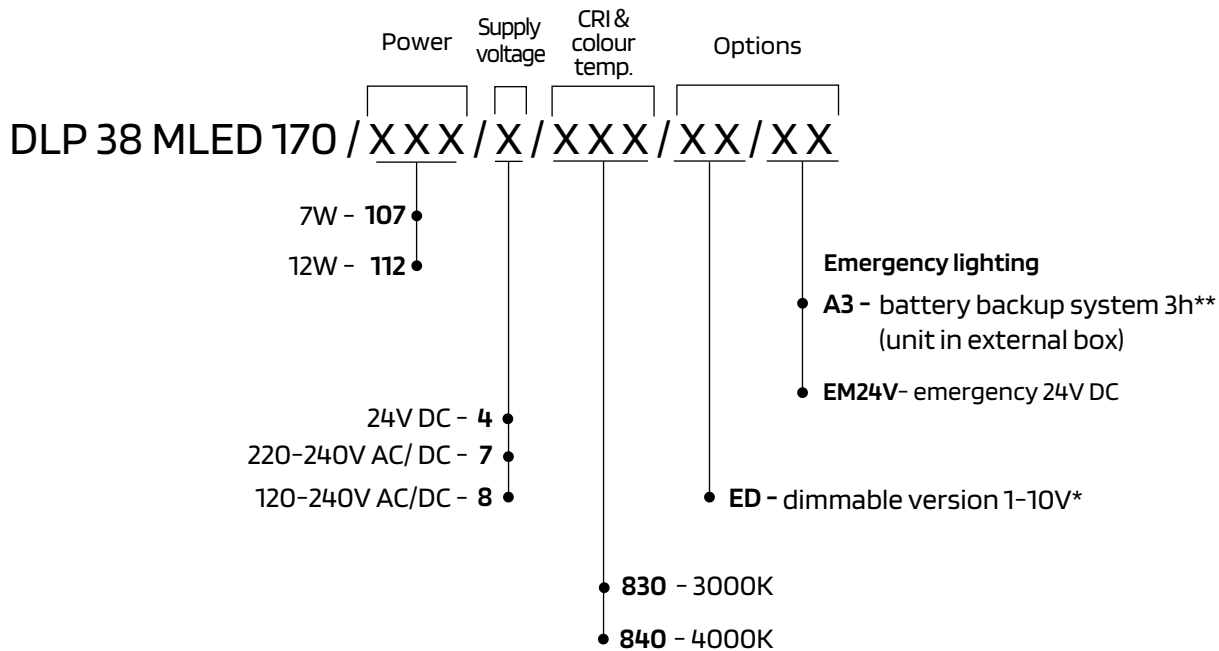

*dimmable version is suitable only with AC current


Example of type description

DLP 38 MLED 170/112/7/830 light fitting with LED source 12W; supply voltage 220-240V AC/DC; colour temp 3000K;

Decor ring with diffuser is an integral part of luminaire but must be ordered separately



LD - SROP (silver ring, opal PC) ordering index: 31-339-9061
LD - WROP (white ring, opal PC) ordering index: 31-339-9060
 Coloured ring with RAL on special request: LD - RAL
 ordering index: 31-339-9062



LD - WRRF (white ring, red filter) ordering index: 31-339-9066
LD - SRRF (silver ring, red filter) ordering index: 31-339-9067
 Coloured ring with RAL on special request: LD - RAL RF
 ordering index: 31-339-9068

TECHNICAL DATA

IP 44

220-240V
AC/DC



OPTIONS

Battery Backup 3h System

120-240V
AC/DC

Dimmable Version

1-10V

24V
DC

Emergency
24V DC