

# ELP 33 MLED



Type	Wattage	Light Source	Lumens	Weight
ELP 33 -MLED220/205/...	2 x 5 W	LED	1215 lm	3,5 kg
ELP 33 -MLED220/209/...	2 x 9 W	LED	2460 lm	3,5 kg
ELP 33 -MLED220/211/...	2 x 11 W	LED	2970 lm	3,5 kg
ELP 33 -MLED240/411/...	4 x 11 W	LED	5720 lm	5,3 kg

## Cornice Luminaire, surface, 2x5W; 2x9W; 2X11W; 4X11W LED

**Application**  
passage ways, cabins

**Approvals**  
according to the rules of relevant  
classification societies, additional IEC

**Housing**  
zinc coated steel,  
powder coated white


**Cover**  
polycarbonate, opal

**Electric**  
flexible wiring, heat resistant up to +105°C

**Cable entry**  
2 inlet, cable max Ø 11 mm


**Mounting**  
4 mounting holes Ø 5,5 mm

### DIMENSIONS [ mm ]

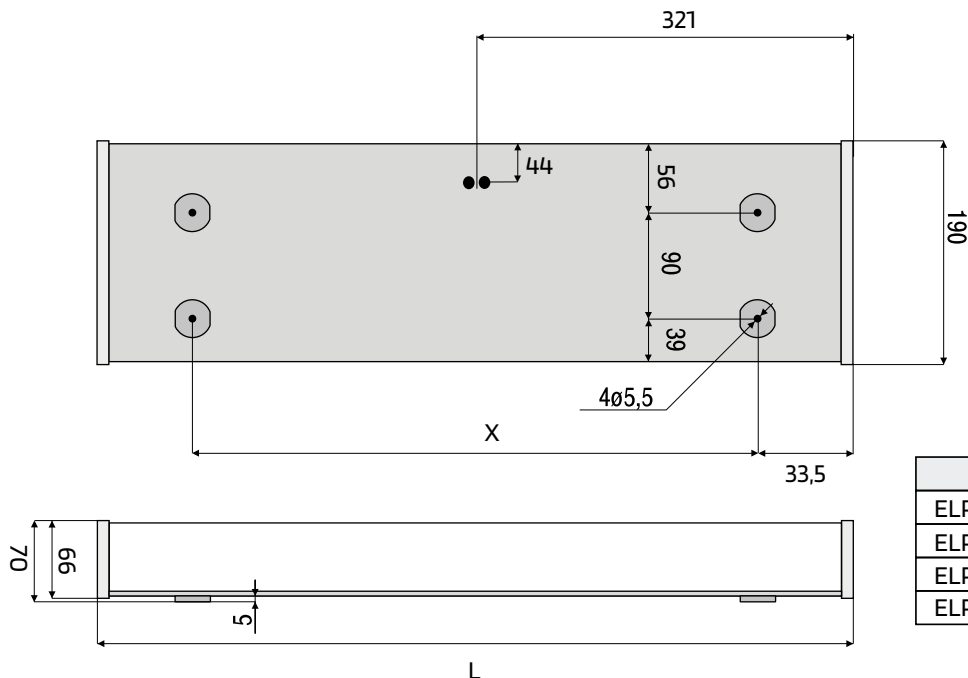

Type	L	X
ELP 33-MLED/2x5W	642	575
ELP 33-MLED/2x9W	642	575
ELP 33-MLED/2x11W	642	575
ELP 33-MLED/4x11W	1252	967

## ORDER SPECIFICATION

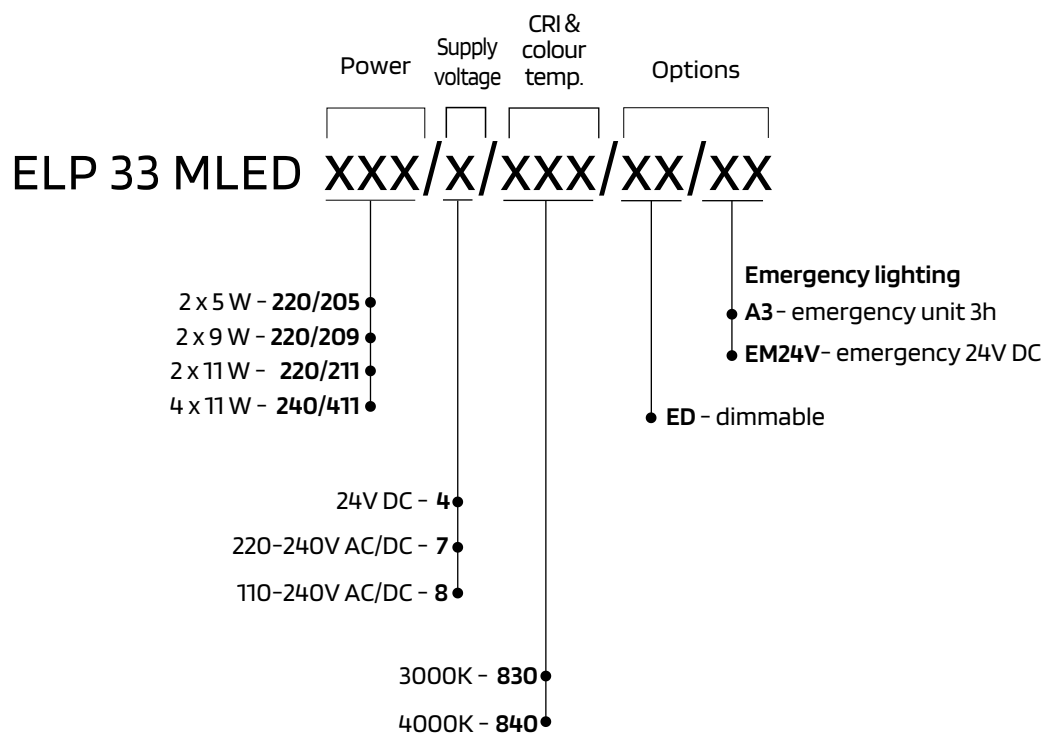

### Example of type description

**ELP 33 MLED220/205/7/840** light fitting with LED source, 2x5W, supply voltage 220V-240V AC/DC, CRI 80, colour temperature 4000K

### TECHNICAL DATA

IP 30

220-240V  
AC/DC



### OPTIONS

110-240V  
AC/DC

Dimmable

24V  
DC

Emergency  
24V DC

Battery  
Backup 3h  
System