

KJP 41 MLED



*switch is standard equipment

Type	Wattage	Light Source	Lumens	Weight
KJP 41-MLED/106	6 W	LED	960 lm	2,5 kg

Berth Light, surface, 1x6W LED

Application
cabins

Approvals
according to the rules
of relevant classification societies,
additional IEC

Housing
zinc coated steel,
powder coated white


Diffuser
polycarbonate, opal

Electric
halogen free flexible wiring,
heat resistant up to +180°C,
2-pole switch


Cable entry
Plug and Socket (GST)

Mounting
2 mounting holes \varnothing 5,5 mm

DIMENSIONS [mm]

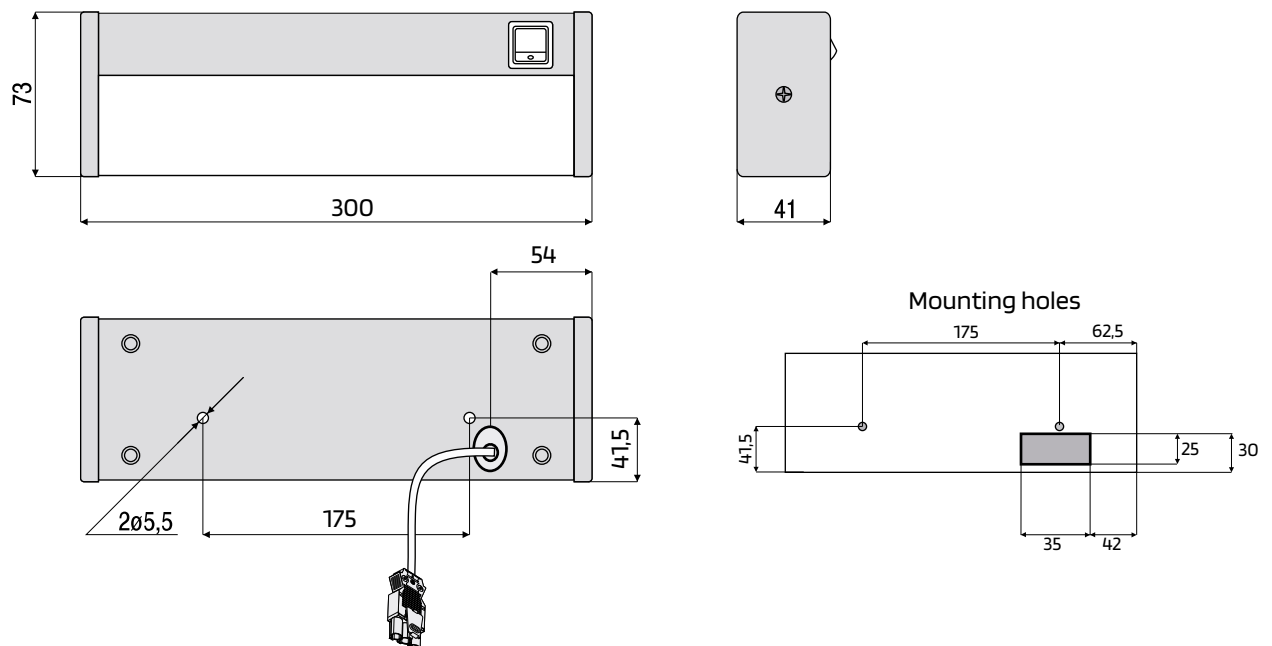

ORDER SPECIFICATION

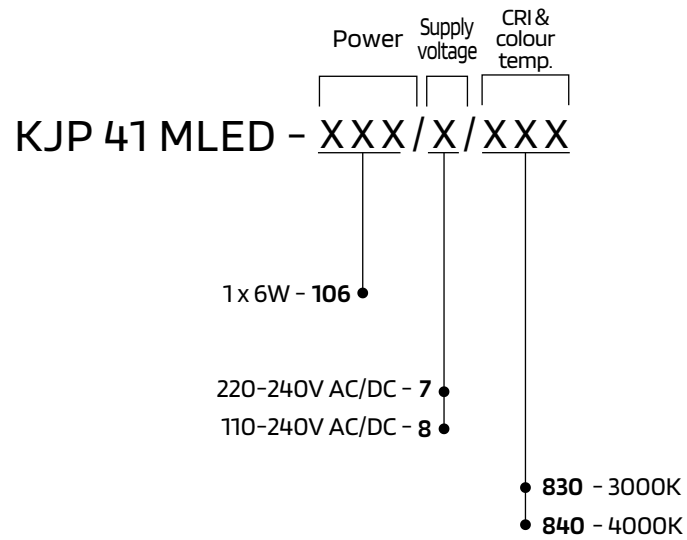

Example of type description

KJP 41-MLED/107/7/830 - light fitting with LED source 1x6W; supply voltage 220-240V AC/DC; colour temperature 3000 K.

TECHNICAL DATA

IP 30

220-240V
AC/DC



OPTIONS

110-240V
AC/DC

Universal
Socket