



# Coldroom Luminaire, surface 2x11W/4x11W LED

KZP 61 MLED



IP 55

220-240V  
50-60 Hz

LED

-30°C

Type	Light source	Light source power	Weight
KZP 61-220/211/MLED	LED	2x11W	4,2 kg
KZP 61-240/411/MLED		4x11W	6,3 kg

### Application

coldroom, refrigerated areas, freezing rooms

### Approvals

according to the rules of relevant classification societies, additional IEC

### Baseplate

stainless steel

### Ambient temp.

- 30°C to + 40°C

### Diffuser

polycarbonate, clear

### Gasket

silicone rubber

### Electric

flexible wiring, heat resistant up to +105°C

### Cable entry

2 plastic cable glands M 20  
cable max  $\varnothing$  13 mm

### Mounting


6 or 8 mounting holes,  $\varnothing$  5 mm

### Electrical connection

see finish section

2.22

[mm]

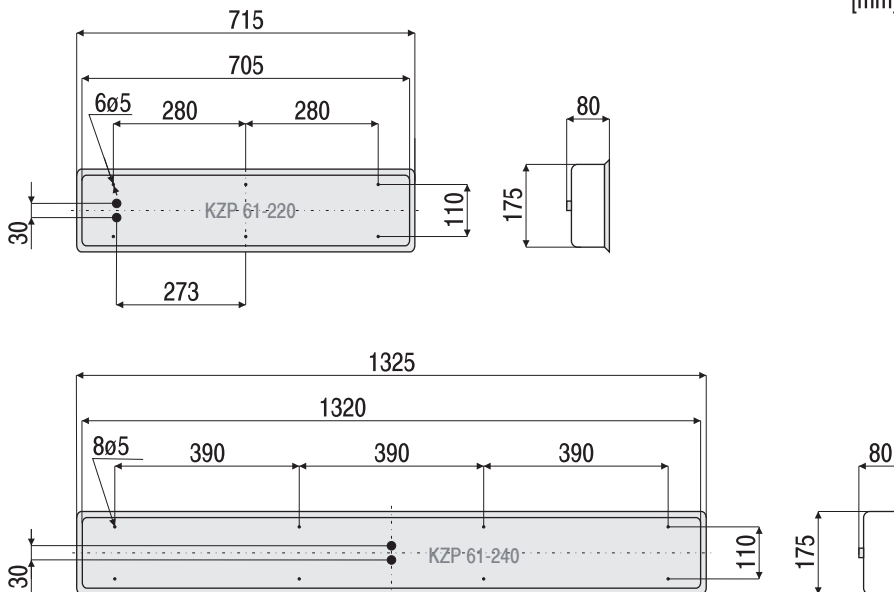

## OPTIONS

110V-240V  
AC/DC


24V  
DC



KZP 61 MLED

Coldroom Luminaire, surface,  
2x11W/4x11W LED

## Order Specification

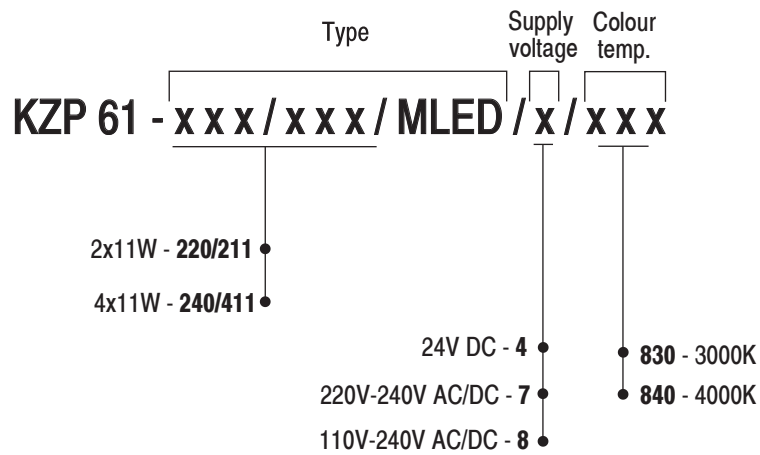

2.22

Example of type description

**KZP 61-220/211/MLED/7/830** - light fitting with LED source; 2x11W; colour temp. 3000K; supply voltage 220V-240V AC/DC.