

# KJP 41 MLED



\*switch is standard equipment

Type	Wattage	Light Source	Lumens	Weight
KJP 41-MLED/107	7 W	LED	960 lm	0,6 kg

## Berth Light, surface, 1x7W LED

**Application**  
cabins

**Approvals**  
according to the rules  
of relevant classification societies,  
additional IEC

**Housing**  
zinc coated steel,  
powder coated white


**Diffuser**  
polycarbonate, opal

**Electric**  
halogen free flexible wiring,  
heat resistant up to +180°C,  
2-pole switch


**Cable entry**  
Plug and Socket (GST)

**Mounting**  
2 mounting holes  $\varnothing$  5,5 mm

### DIMENSIONS [ mm ]

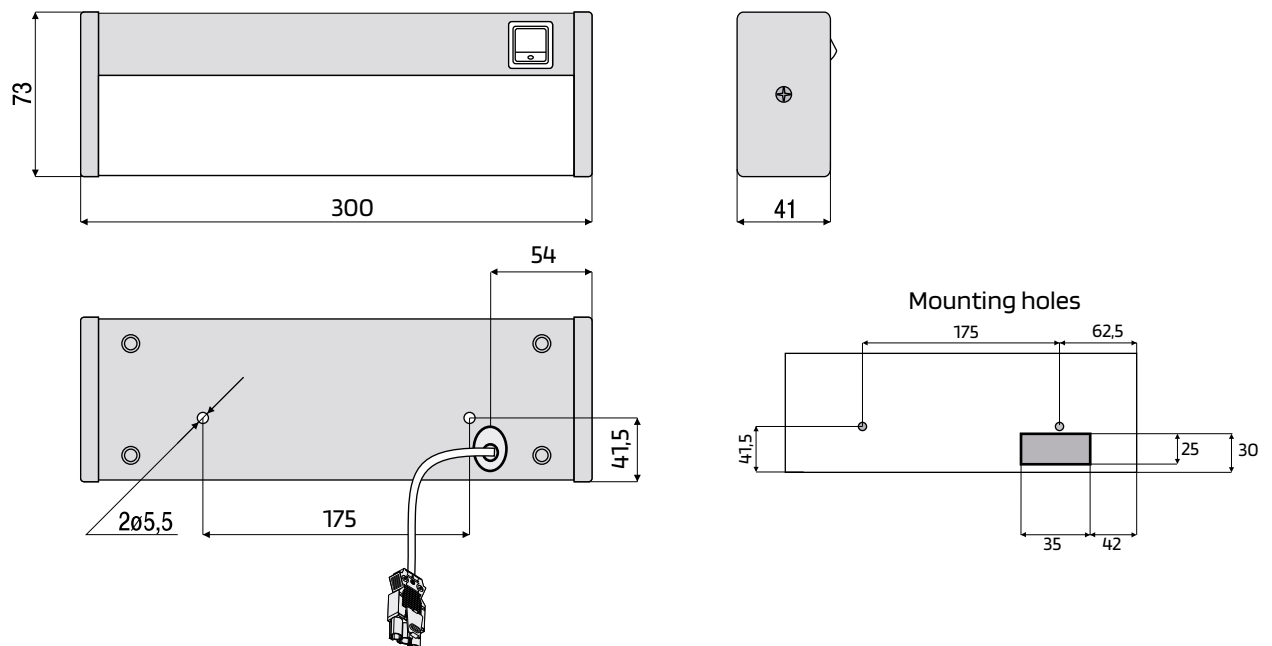

## ORDER SPECIFICATION

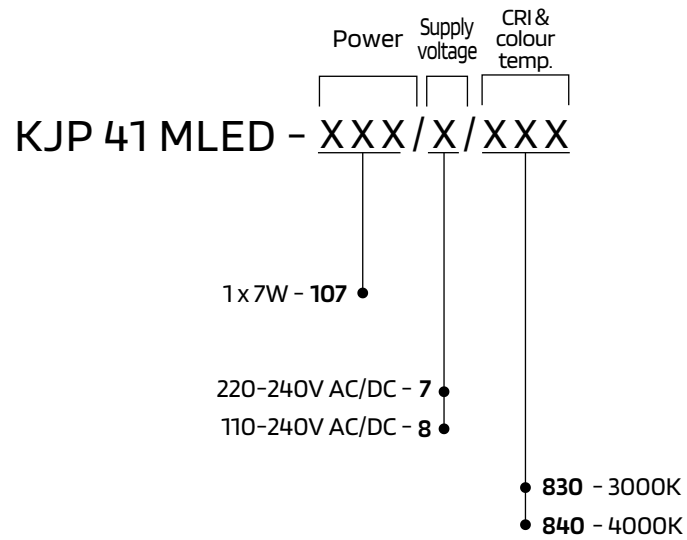

### Example of type description

**KJP 41-MLED/107/7/830** - light fitting with LED source 1x7W; supply voltage 220-240V AC/DC; colour temperature 3000 K.

### TECHNICAL DATA

IP 30

220-240V  
AC/DC



### OPTIONS

110-240V  
AC/DC

Universal  
Socket