

INDUSTRIAL
LUMINAIRES

PTE40 MLED





APPLICATION

Dustproof and watertight luminaire for LED source type. Designed for the industrial facilities, utility rooms: warehouses, production spaces, workshops, pathways and open areas.
Luminaire equipped with lens mounted on LED panel for light pattern shaping and reducing glare.

TECHNICAL DATA


Protection class:	I
Protection degree:	IP 66/67
Ambient temperature:	from -25°C to +45°C
Power supply:	220-240V AC
Power factor:	> 0,95
Protection degree:	IK 08
Lifetime:	L70B50 > 72 000 h

IP 66/67; LED; CLASS I

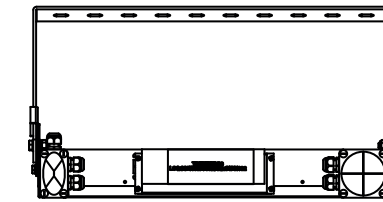

DIMENSIONS [mm]

Type	L	W
PTE 40-MLED2	379	378
PTE 40-MLED3	505	378
PTE 40-MLED2	638	378

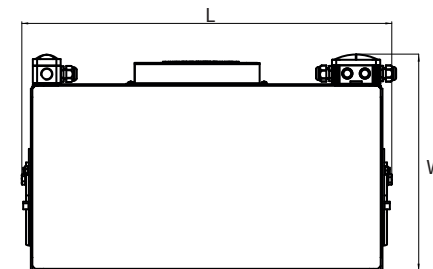

TYPE	WATTAGE	LUMEN OUTPUT	NUMBER OF CHAMBERS	WEIGHT
PTE 40-MLED2/1017	100 W	14274 lm	1	10 kg
PTE 40-MLED3/1347	135 W	18766 lm	1	14 kg
PTE 40-MLED4/1257	205 W	28532 lm	1	16,6 kg

CONSTRUCTION

Housing:	powder painted steel, aluminium radiator,
Diffuser:	hardened glass
Mounting bracket*:	powder painted steel

*mounting bracket ordered separately

TECHNICAL DATA



APPROVALS



INDUSTRIAL LUMINAIRES | available configurations

PTE40
MLED



WATTAGE	CRI AND COLOUR TEMP.	OPTICS	OPTIONS
2 100 W	840 CRI 80 4000 K	N narrow	DALI
3 134 W		W wide	
4 205 W		AS asymmetric	

